




PET TAPE - DOUBLE SIDED

Product Features

Non-base material white adhesive tape with rubber material directly laminated on both sides of PET release film

Application

Can be used for the rework for blistering and foreign objects of OCA, residual adhesive removal of OCA optical glue/LOCA residue during production and rework of liquid crystal modules and capacitive screen TP

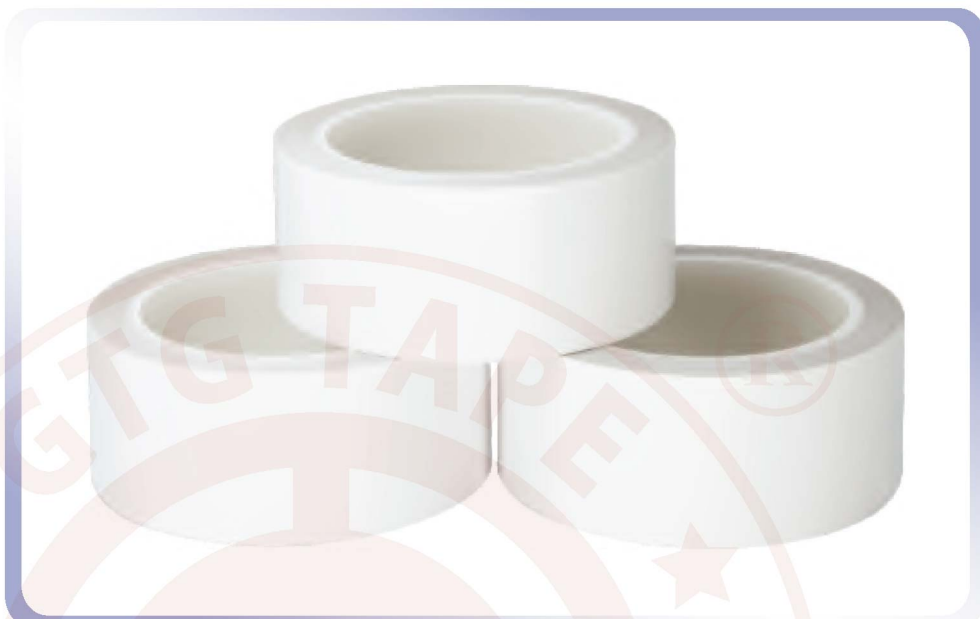

White

Technical Data

Product	Structure (from Top to Bottom)	Adhesive	Thickness	180° Peeling Force	Temperature resistance
			(mm)	(N/inch)	(°C)
6015		Acrylic pressure sensitive Adhesive	0.15	13	- 5-90
6020			0.20	13	- 5-90

* The above technical information and data are typical values only and should not be used for specification purposes.

Product Characteristics

- High adhesion and extensibility
- No residue, no solvent, low pollution

Product Sizes

* Contact sales representative for available sizes

Shelf Life

12 Months Storage at 23 °C and 65% Relative Humidity