


PVC BLACK PROTECTION TAPE

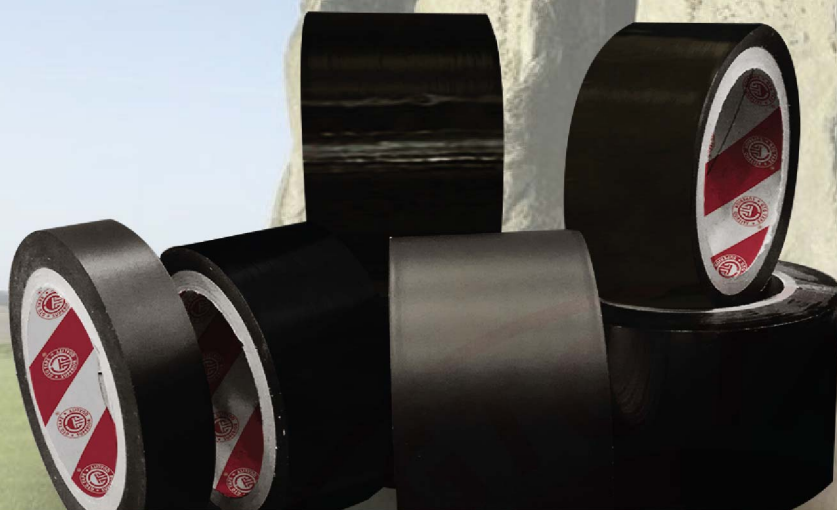

Product Features

Premium Grade Polyvinyl Chloride Film
Coated with Solvent Rubber Adhesive

Application

Ideally suited for protection against rusting, dirt, UV, or scratches on the aluminium surface in a short term basis

Product Sizes

Jumbo Roll Size :1250mm x 40m
Paper Core Size :76mm

* Contact sales representative for available sizes

Colours



Black

Technical Data

Product	Total Thickness		Peel Adhesion	Tensile Strength	Elongation % at break
	(um)	(mil)	(N/in)	ASTM D-3759 (N/cm)	ASTM D-3759
BT12	120	4.7	1.5	20	130%
BT13	130	5.1	1.5	20	130%
BT15	150	5.9	1.5	20	130%

Product Characteristics

- Excellent tack adhesive with unique durable properties
- Bacteria and fungus resistant
- Premium grade adhesive with high degree of softness allow for a well-fit surface
- Possess characteristics of improving flame resistance as well as high voltage insulation
- Highly resistant to UV, water, oil, acids and corrosive chemicals
- Anti-abrasion due to feature of high resistance against solvent and climate temperature
- Strong anti-aging properties
- Ideal for long storage and maintain high viscosity even extreme variation in temperature
- Nature-friendly product which is harmless upon environment

Shelf Life

12 Months Storage at 23°C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

