

DOUBLE SIDED TISSUE TAPE



Product Features

Double Sided Tissue Tape Coated with Hotmelt, Solvent Acrylic based & Acrylic Emulsion Adhesive

Application

Mounting of lightweight products, splicing of paper & joining of 2 lightweight surfaces such as sealing documents and interior decoration, hand-made product and souvenir purposes

Product Sizes

Jumbo Roll Size :1060mm x 1000m
Paper Core Size :76mm

* Contact sales representative for available sizes

Shelf Life

12 Months Storage at 23°C and 65% Relative Humidity

Colours



White


Technical Data

Product	Adhesive	Tissue+Adhesive Thickness		Initial Tack (#)	Peel Adhesion		Holding Power GB/4851-1998 1kg
		(um)	(mil)		(N/in)	ASTM D-3330 (oz/in)	
DSTT01	Synthetic Rubber	60	2.4	8†	12†	43	-
DSTT02	Synthetic Rubber	70	2.8	10†	13†	47	-
DSTT03	Synthetic Rubber	80	3.2	10†	15†	54	-
DSTT04	Synthetic Rubber	90	3.5	10†	15†	54	-
DSTT05	Synthetic Rubber	100	3.9	12†	17†	61	-
DSTT11	Solvent Acrylic	90	3.5	12†	10†	54	≥24h
DSTT12	Solvent Acrylic	100	3.9	14†	12†	54	≥24h
DSTT13	Solvent Acrylic	110	4.3	14†	14†	58	≥48h
DSTT21	Acrylic Emulsion	80	3.2	5†	13†	22	≥24h
DSTT22	Acrylic Emulsion	80	3.5	5†	15†	29	≥24h
DSTT01	Acrylic Emulsion	105	4.1	5†	16†	18	≥48h

Product Characteristics

- High adhesion strength for immediate joining of two surfaces (Quick stick properties)
- Nonwoven carrier enables excellent conformability. High conformability and high adhesion to a variety of surfaces
- Hand tearable
- Well performance double-sided adhesive for photos, documents, wallpaper, scrapbooking, crafts, ribbon, glitter, origami, cards and boxes

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.

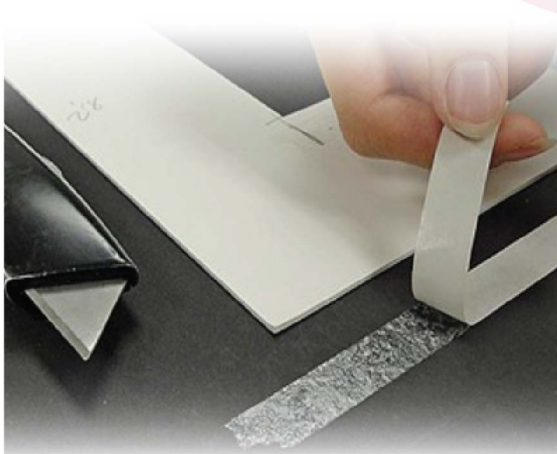

GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

