


DOUBLE SIDED PE FOAM TAPE

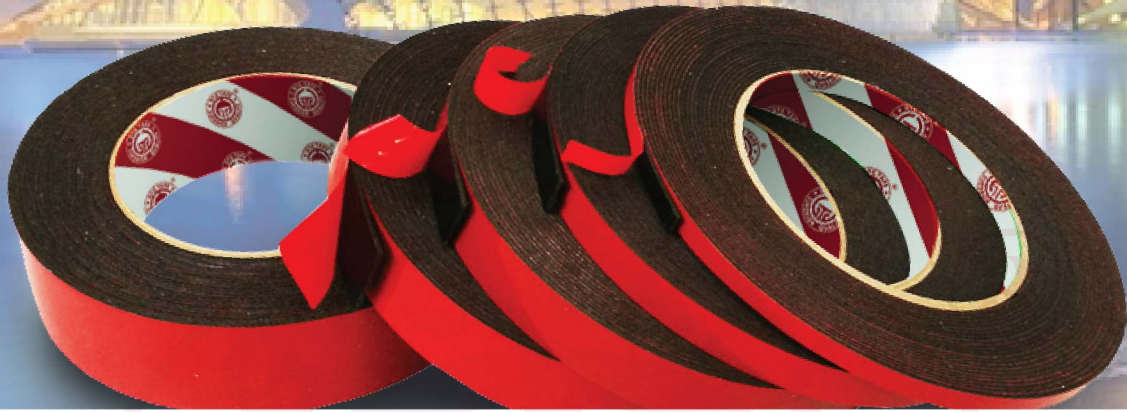

Product Features

Double Sided PE Foam coated with Synthetic Rubber Adhesive or Solvent Acrylic Based Adhesive

Application

Mounting of lightweight materials, bonding, vibration dampening, splicing, laminating, permanent fastener, sealing. mostly used in automobile industry such as door sealing, mounting strip, pedal metal board & etc

Product Sizes

Jumbo Roll Size :1060mm x 300m

Paper Core Size :76mm

* Contact sales representative for available sizes



Colours



White



Black

(PE Foam) with various colors release liner

Technical Data

Product	Adhesive	Total Thickness		Initial Tack	Peel Adhesion	
		(mm)	(mil)	(#)	(N/in)	ASTM D-3330 (oz/in)
DSPEFT01	Synthetic Rubber	1.25	49	10†	18†	65
DSPEFT02	Solvent Acrylic	1.25	49	10†	12†	43

Product Characteristics

- Unique rubber adhesive system provides quick stick
- Good adhesion, good tensile strength, permanent bond, highly conformable, good moisture resistance
- Designed for irregular surface
- Durable & flexible
- Provides cushioning
- Ideally for low surface energy and excellent in sound weakening as well as vibration dampening
- Environmental safe material: made of special acrylic adhesives, senior polyethylene foams with variety thickness, non-toxic
- Double coated tapes leave no puncture holes
- Good initial tack

Shelf Life

12 Months Storage at 23 °C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

