

PROTECTIVE FILM FOR ALUMINIUM PROFILE




Product Features

Special Formulated Polyethylene Film as Substrate and Polyacrylate Resin as Pressure Sensitive Adhesive



Application

Provide surface protection for different kinds of aluminium alloy profiles such as aluminium alloy coated profiles, oxide coloured profiles, oxide polished profiles, plastic profiles, steel door and window profiles to avoid damage during transportation, storage, processing and installation.

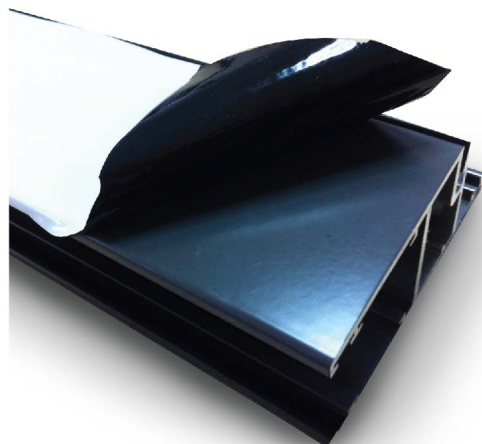

Colours



Technical Data

Base Film Thickness (µm)	50-200
Adhesive Thickness (µm)	5-30
Peel Strength 180° C (g/cm)	50-250
Horizontal Elongation at Break (%)	300-600
Vertical Elongation at Break (%)	200-300
Heat Resistance (°C)	60

Product Characteristics

- Flexible and soft
- Highly conformable on most surfaces
- Easy to peel off without residue left
- Excellent insulation
- Moisture-proof
- Anti-corrosion

Product Sizes

Roll Size : (20-2100)mm x (100-500)m

Shelf Life

12 Months Storage at 23° C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

