

PET TAPE - DOUBLE SIDED




Product Features

Non-base material white adhesive tape with rubber material directly laminated on both sides of PET release film

Application

Can be used for the rework for blistering and foreign objects of OCA, residual adhesive removal of OCA optical glue/LOCA residue during production and rework of liquid crystal modules and capacitive screen TP

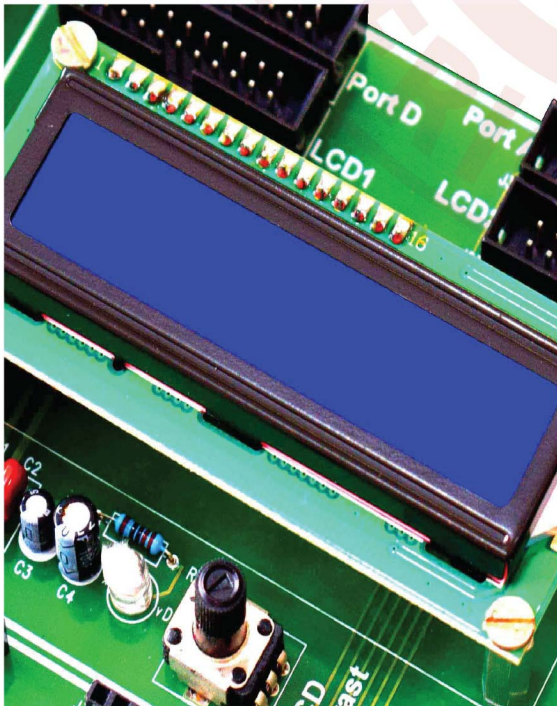

Colours



White

Technical Data

Product	Structure (from Top to Bottom)	Adhesive	Thickness	180° Peeling Force	Temperature resistance
			(mm)	(N/inch)	(°C)
6015		Acrylic pressure sensitive Adhesive	0.15	13	- 5-90
6020			0.20	13	- 5-90

* The above technical information and data are typical values only and should not be used for specification purposes.

Product Characteristics

- High adhesion and extensibility
- No residue, no solvent, low pollution

Product Sizes

* Contact sales representative for available sizes

Shelf Life

12 Months Storage at 23° C and 65% Relative Humidity

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.



GTG MANUFACTURING SDN. BHD. (968289-M)

Website: www.gtgroup.com.my

Tel: +603-8725 9988 | Fax: +603-8725 9989 | Email: info@gtgroup.com.my

