

VINI-TAPE® Denka

PVC adhesive insulating tapes for electrical purposes



Application


Terminal processing of power-cables, wiring and insulation of electrical joints.

Protection, binding and identification of cables and pipes.

Protection, repairs and binding for homes, construction, tying works and other uses.

Bundling and repairing automotive wire harnesses.

Colours

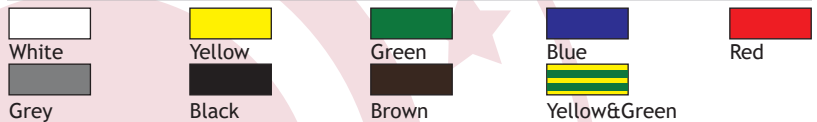

*Please note that these colors shown are printed colors :therefore they may differ from actual colors.

Product Characteristics

- Good quality electrical tape and excellent resistance to corrosion. Elastic tape backing and high quality design of the adhesive shall be applied to not only conform and produce a uniform covering in long term, but also prevent from flagging.
- Easy cut quality by a special treatment on the side of the tape.
- Not deformed in high temperatures and holds its shape. Good stock rotation is recommended.

Specification

Product	Total Thickness	Width	Length	Packing
	(mm)			
#101	0.2	19	10 Yards	500
			10 Meters	500
#102	0.15	19	10 Yards	500
#103	0.13	19	10 Yards	500

Physical Properties

Product	Adhesive Strength (N/10mm)		Tensile Strength	Elongation	Volume Resistivity	Elongation % at break
	Adhesion Test Panel	Adhesion Backing	N/10mm	%	MΩ•cm	500V x 1minute
#101	1.68	2.19	36.4	191	6.99 x 10 ⁸	Good
#102	1.55	2.05	27.3	188	2.90 x 10 ⁸	Good
#103	1.24	1.89	23.3	180	2.05 x 10 ⁸	Good

Disclaimer : While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The user must, by test or otherwise, determine suitability for this purpose.

Authorised Distributed by:

GTG MANUFACTURING SDN. BHD. (968289-M)

Address: Lot 1-10, Jalan Perindustrian Mahkota Utama, Kawasan Perindustrian Mahkota, 43700 Beranang, Selangor, Malaysia.

Tel: +603-8724 7168 | Fax: +603-8723 7688 | Email: info@gtggroup.com.my | Website: www.gtggroup.com.my